

# GS-33 GROUND SUPPORT TOWER

## FEATURES

40' Maximum Height  
Modular Design For Fast Assembly  
Easy Transport  
Adjustable Leveling Pads  
Lowers To 6" For Easy Loading  
Tower Truss Sections Available In 12", 16" or 20.5"

4 Outriggers (Included) Are Required For Each Tower  
Outdoor Use Requires Guy Wires

## SPECIFICATIONS

Parts Breakdown:  
5' Hinged Base Section  
Head Block  
Sleeve Block  
Three 10' Tower Sections  
4 Legs/Outriggers  
4 Leg/Outrigger Braces


## AVAILABLE ACCESSORIES

Sleeve Blocks Available For:  
Box Truss  
Triangle Truss  
Single and Double Hung Club Truss  
Motors Available


## WEIGHT LOADING INFORMATION

Max Weight Rating: 12" Tower - 2000 lbs. At Any Height  
Max Weight Rating: 16" Tower - 3000 lbs. At Any Height  
Weight Loading Certified By Structural Engineering Firm

Hinge Base

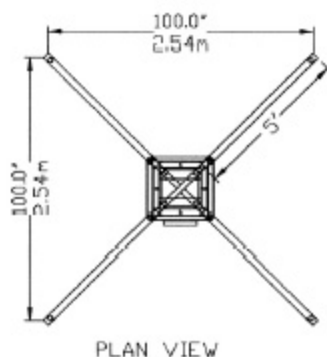


PLAN VIEW

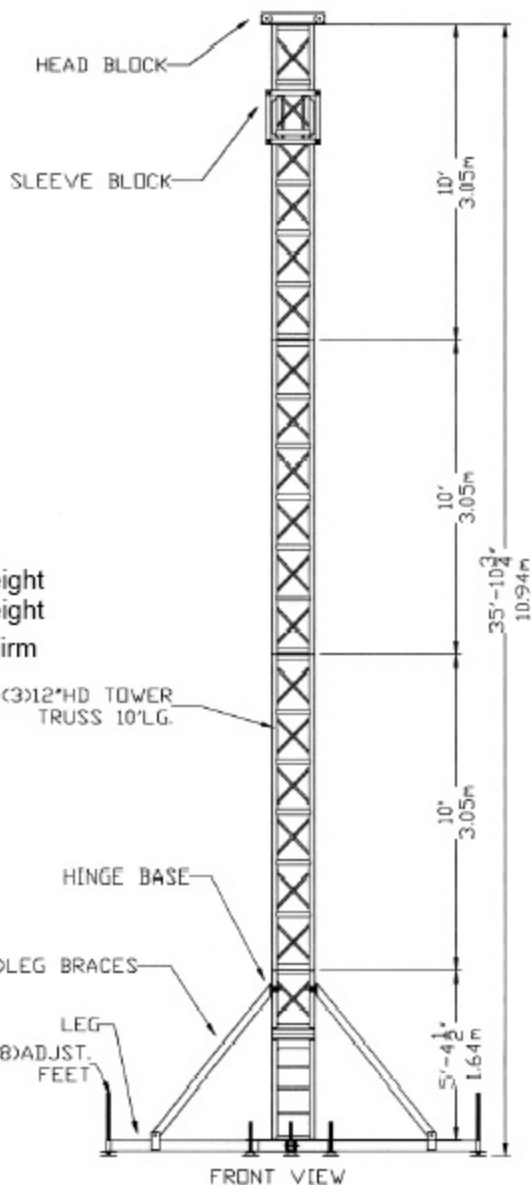

FRONT VIEW

Tower Section

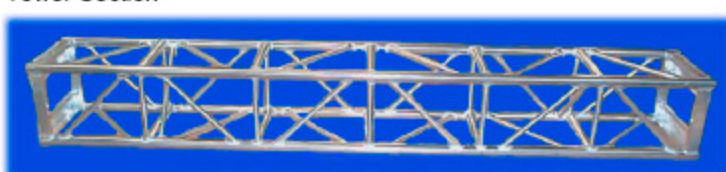

Head Block



Sleeve Block

